




BRIDA A°C° CON CUELLO P/SOLDAR ZINC.

ANSI 150

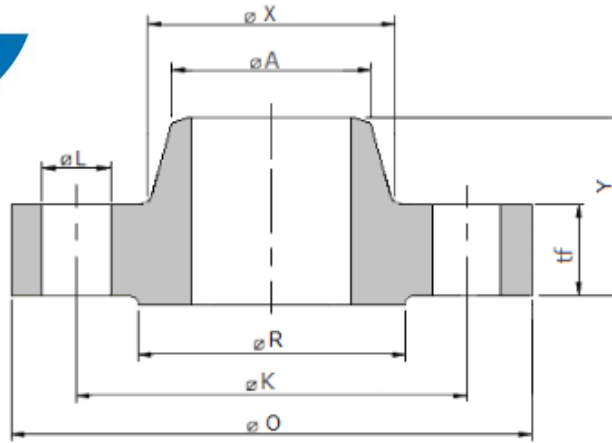

Tamaño Nominal Tubería	Ø exterior O	Mínimo espesor tf	Ø Hub X	Ø Superior Hub A	Longitud Hub Y	Ø Raised Face R	Taladros			Ø Tornillo
							Ø K centro tal.	Nº tal	Ø tal. L	
1/2 (15)	3.5 (90)	0.38 (9.6)	1.19 (30)	0.84 (21.3)	1.81 (46)	1.38 (34.9)	2.38 (60.3)	4	5/8 (15.875)	1/2 (12.7)
3/4 (20)	3.88 (100)	0.44 (11.2)	1.5 (38)	1.05 (26.7)	2 (51)	1.69 (42.9)	2.75 (69.9)	4	5/8 (15.875)	1/2 (12.7)
1 (25)	4.25 (110)	0.5 (12.7)	1.94 (49)	1.32 (33.4)	2.12 (54)	2 (50.8)	3.12 (79.4)	4	5/8 (15.875)	1/2 (12.7)
1 1/4 (32)	4.62 (115)	0.56 (14.3)	2.31 (59)	1.66 (42.2)	2.19 (56)	2.5 (63.5)	3.5 (88.9)	4	5/8 (15.875)	1/2 (12.7)
1 1/2 (40)	5 (125)	0.62 (15.9)	2.56 (65)	1.9 (48.3)	2.38 (60)	2.88 (73)	3.88 (98.4)	4	5/8 (15.875)	1/2 (12.7)
2 (50)	6 (150)	0.69 (17.5)	3.06 (78)	2.38 (60.3)	2.44 (62)	3.62 (92.1)	4.75 (120.7)	4	3/4 (19.05)	5/8 (15.875)
2 1/2 (65)	7 (180)	0.81 (20.7)	3.56 (90)	2.88 (73)	2.69 (68)	4.12 (104.8)	5.5 (139.7)	4	3/4 (19.05)	5/8 (15.875)
3 (80)	7.5 (190)	0.88 (22.3)	4.25 (108)	3.5 (88.9)	2.69 (68)	5 (127)	6 (152.4)	4	3/4 (19.05)	5/8 (15.875)
3 1/2 (90)	8.5 (215)	0.88 (22.3)	4.81 (122)	4 (101.6)	2.75 (70)	5.5 (139.7)	7 (177.8)	8	3/4 (19.05)	5/8 (15.875)
4 (100)	9 (230)	0.88 (22.3)	5.31 (135)	4.5 (114.3)	2.94 (75)	6.19 (157.2)	7.5 (190.5)	8	3/4 (19.05)	5/8 (15.875)
5 (125)	10 (255)	0.88 (22.3)	6.44 (164)	5.56 (141.3)	3.44 (87)	7.31 (185.7)	8.5 (215.9)	8	7/8 (22.225)	3/4 (19.05)
6 (150)	11 (280)	0.94 (23.9)	7.56 (192)	6.63 (168.3)	3.44 (87)	8.5 (215.9)	9.5 (241.3)	8	7/8 (22.225)	3/4 (19.05)
8 (200)	13.5 (345)	1.06 (27)	9.69 (246)	8.63 (219.1)	3.94 (100)	10.62 (269.9)	11.75 (298.5)	8	7/8 (22.225)	3/4 (19.05)
10 (250)	16 (405)	1.12 (28.6)	12 (305)	10.75 (273)	3.94 (100)	12.75 (323.8)	14.25 (362)	12	1 (25.4)	7/8 (22.225)
12 (300)	19 (485)	1.19 (30.2)	14.38 (365)	12.75 (323.8)	4.44 (113)	15 (381)	17 (431.8)	12	1 (25.4)	7/8 (22.225)
14 (350)	21 (535)	1.31 (33.4)	15.75 (400)	14 (355.6)	4.94 (125)	16.25 (412.8)	18.75 (476.3)	12	1 1/8 (28.575)	1 (25.4)
16 (400)	23.5 (595)	1.38 (35)	18 (457)	16 (406.4)	4.94 (125)	18.5 (469.9)	21.25 (539.8)	16	1 1/8 (28.575)	1 (25.4)
18 (450)	25 (635)	1.5 (38.1)	19.88 (505)	18 (457)	5.44 (138)	21 (533.4)	22.75 (577.9)	16	1 1/4 (31.75)	1 1/8 (28.575)
20 (500)	27.5 (700)	1.62 (41.3)	22 (559)	20 (508)	5.62 (143)	23 (584.2)	25 (635)	20	1 1/4 (31.75)	1 1/8 (28.575)
24 (600)	32 (815)	1.81 (46.1)	26.12 (663)	24 (610)	5.94 (151)	27.25 (692.2)	29.5 (749.3)	20	1 3/8 (34.925)	1 1/4 (31.75)